


37P	55.42	63.50	69.32	8.38	12.50
25P	38.96	47.04	53.04	8.38	12.50
15P	25.25	33.32	39.14	8.38	12.50
9P	16.92	24.99	30.81	8.38	12.50
POS. NO.	A	B	C	D	E
	DIMENSION				

SPECIFICATIONS:
 Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:30m ohm MAX
 Insulation resistance:5000M ohm MIN
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C ~ +85°C

MATERIAL AND FINISH
 Insulator:PBT+30%G.F(UL94V-0)
 Contact:Copper Alloy Nickel Undercoated Selective Gold Plated
 Finish:Metal Iron With Tin Plated

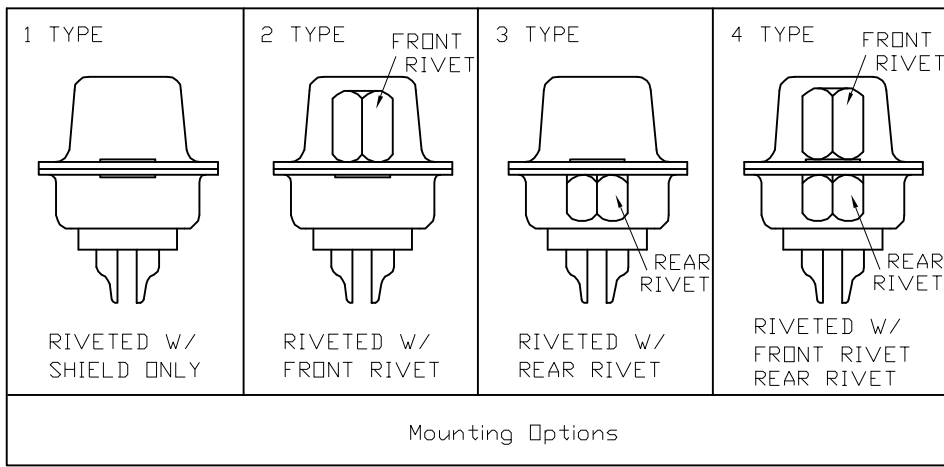

PART NO.
 Z-SUBDB * F * 0 * * * * 0

NO OF CONTACTS
 A=9PIN
 B=15PIN
 C=25PIN
 E=37PIN

TYPE
 F=FEMALE

MOUNTING OPTIONS
 1=RIVETED W/SHIELD ONLY
 2=RIVETED W/FRONT RIVET
 3=RIVETED W/REAR RIVET
 4=RIVETED W/FRONT RIVET REAR RIVET

CONTACT MATERIAL
 2=BRASS
 7=PHOSPHOR BRONZE

LOGO
 0=NEXTRON LOGO
 1=NO LOGO

INSULATOR COLOR
 0=BLACK
 6=BLUE
 9=WHITE

INSULATOR MATERIAL
 0=PBT
 2=NYLON

PLATED
 A=GOLD 1u"/LIGHT TIN
 B=GOLD 3u"/LIGHT TIN
 C=GOLD 5u"/LIGHT TIN
 E=GOLD 15u"/LIGHT TIN

A2		尺寸变更	4	07/28	
REV.	ECN. NO.	DESCRIPTION	DATE	DRAWN	APPD

DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	NAME: D-SUB焊接式PCB母端	nextron NEXTRONICS ENGINEERING CORP.	
GENERAL TOLERANCES: (UNLESS SPECIFIED)	PART NO: Z-SUBDB*F*0****0	TITLE: CUSTOMER DWG	C
4 PLACE ± * ±.	APPD:	DWG. NO: 010-0000-599	
3 PLACE ± * ±.	CHKD:	SCALE: 1/1	SHEET: 1/1
2 PLACE ± 0.30 ±.	DRAWN: 畢杏子 07/28.11	REV.: A2	
1 PLACE ± 0.10 ±.			
ANGULAR: X°± 1'			