
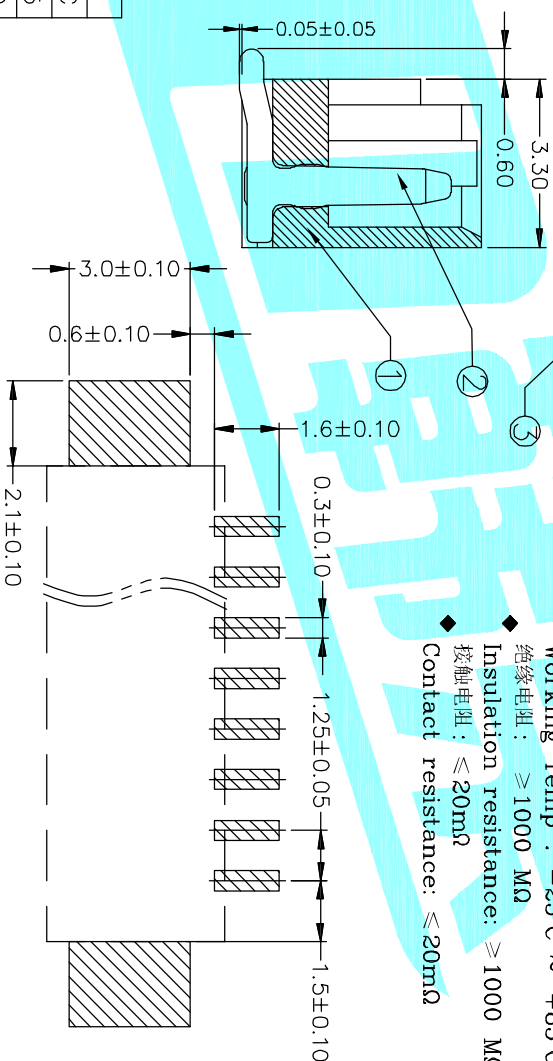


No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
2P	4.25	1.25	7.55
3P	5.50	2.50	8.80
4P	6.75	3.75	10.05
5P	8.00	5.00	11.30
6P	9.25	6.25	12.55
7P	10.50	7.50	13.80
8P	11.75	8.75	15.05
9P	13.00	10.00	16.30

No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
10P	14.25	11.25	17.55
11P	15.50	12.50	18.80
12P	16.75	13.75	20.05
13P	18.00	15.00	21.30
14P	19.25	16.25	22.55
15P	20.50	17.50	23.80
16P	21.75	18.75	25.05

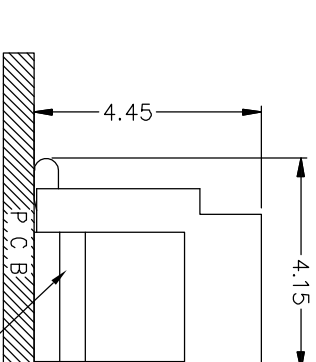

- 技术参数 SPECIFICATIONS
- ◆ 适用线规：AWG#28~#32
  - ◆ Applicable Wire: AWG#28~#32
  - ◆ 额定电压：125V DC,AC(rms)
  - ◆ Rated voltage: 125V DC,AC(rms)
  - ◆ 额定电流：1A
  - ◆ Rated Current: 1A
  - ◆ 耐压值：500V AC/minute
  - ◆ Withstand voltage: 500V AC/min.
  - ◆ 工作温度：-25°C ~ +85°C
  - ◆ Working Temp : -25°C ~ +85°C
  - ◆ 绝缘电阻：≥ 1000 MΩ
  - ◆ Insulation resistance: ≥ 1000 MΩ
  - ◆ 接触电阻：≤ 20mΩ
  - ◆ Contact resistance: ≤ 20mΩ

PCB Layout

③	Solder Tab	—	2	Phosphor bronze	Ag-PLATED	—
②	PIN	—	—	Phosphor bronze	Ag-PLATED	—
①	Base	—	1	PA46	—	—
ITEM	PART NAME	TER/NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS

DRAWN: JIANKUN.LIU 2015.03.17

DATE: \_\_\_\_\_

TITLE: FPC

ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
NEW	A	—	NEW	—	—	—
TOLERANCES ARE				30~125μm ±0.30	10~30 ±0.20	5~10 ±0.15
				~5 ±0.10	±2'	DRAWING NO.
PART NO.				1.25T-nP-WV		PROJ. 1 OF 1