




2SD1616/A

NPN SILICON TRANSISTOR

NPN EPITAXIAL SILICON TRANSISTOR

■ DESCRIPTION

- * Audio frequency power amplifier
- * Medium speed switching

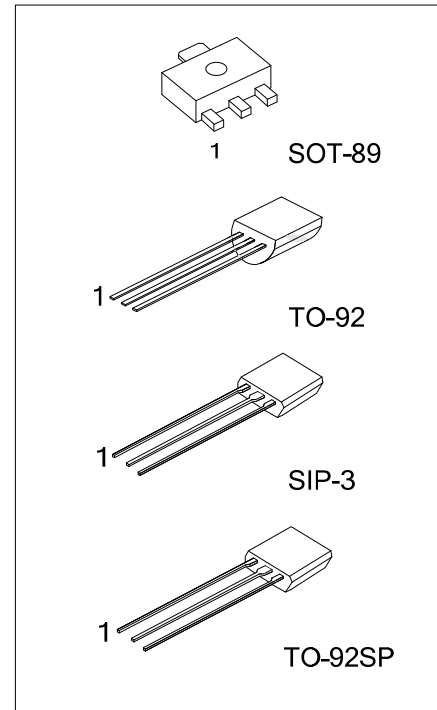

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free Plating	Halogen-Free		1	2	3	
-	2SD1616G-x-AB3-R	SOT-89	B	C	E	Tape Reel
-	2SD1616G-x-G03-K	SIP-3	E	C	B	Bulk
2SD1616L-x-T92-B	2SD1616G-x-T92-B	TO-92	E	C	B	Tape Box
2SD1616L-x-T92-K	2SD1616G-x-T92-K	TO-92	E	C	B	Bulk
2SD1616L-x-T9S-K	2SD1616G-x-T9S-K	TO-92SP	E	C	B	Bulk
-	2SD1616AG-x-AB3-R	SOT-89	B	C	E	Tape Reel
-	2SD1616AG-x-G03-K	SIP-3	E	C	B	Bulk
2SD1616AL-x-T92-B	2SD1616AG-x-T92-B	TO-92	E	C	B	Tape Box
2SD1616AL-x-T92-K	2SD1616AG-x-T92-K	TO-92	E	C	B	Bulk
2SD1616AL-x-T9S-K	2SD1616AG-x-T9S-K	TO-92SP	E	C	B	Bulk

Note: Pin Assignment: C: Collector B: Base E: Emitter

<p>2SD1616G-x-AB3-R</p> <p>(1)Packing Type (2)Package Type (3)Rank (4)Green Package</p>	<p>(1) B: Tape Box, K: Bulk, R: Tape Reel (2) AB3: SOT-89, G03: SIP-3, T92: TO-92, T9S: TO-92S (3) x: refer to Classification of h_{FE1} (4) G: Halogen Free and Lead Free, L: Lead Free</p>
---	---

MARKING

PACKAGE	MARKING	
	2SD1616	2SD1616A
SOT-89		
SIP-3		
TO-92		
TO-92SP		

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT	
Collector to Base Voltage	V_{CBO}	2SD1616	60	V
		2SD1616A	120	
Collector to Emitter Voltage	V_{CEO}	2SD1616	50	V
		2SD1616A	60	
Emitter to Base Voltage	V_{EBO}	6	V	
Collector Current	DC	I_C	1	A
	Pulse(Note2)	I_{CM}	2	A
Total Power Dissipation	P_C	750	mW	
Junction Temperature	T_J	+150	$^\circ\text{C}$	
Storage Temperature	T_{STG}	-55 ~ +150	$^\circ\text{C}$	

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Pulse width \leq 10ms, Duty cycle $<$ 50%.






■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=1A, I_B=50mA$		0.15	0.3	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=1A, I_B=50mA$		0.9	1.2	V
Base Emitter On Voltage	$V_{BE(ON)}$	$V_{CE}=2V, I_C=50mA$	600	640	700	mV
Collector Cut-Off Current	I_{CBO}	$V_{CB}=60V$			100	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=6V$			100	nA
DC Current Gain	h_{FE1}	$V_{CE}=2V, I_C=100mA$	135		600	
	h_{FE2}	$V_{CE}=2V, I_C=1A$	81			
Transition Frequency	f_T	$V_{CE}=2V, I_C=100mA$	100	160		MHz
Output Capacitance	C_{ob}	$V_{CB}=10V, f=1MHz$			19	pF
Turn On Time	t_{ON}	$V_{CE}=10V, I_C=100mA$		0.07		μs
Storage Time	t_{STG}	$I_{B1} = -I_{B2} = 10mA$		0.95		μs
Fall Time	t_F	$V_{BE(OFF)} = -2 \sim -3V$		0.07		μs





■ CLASSIFICATION OF h_{FE1}

RANK	Y	G	L
h_{FE1}	135 ~ 270	200 ~ 400	300 ~ 600

TYPICAL CHARACTERISTICS

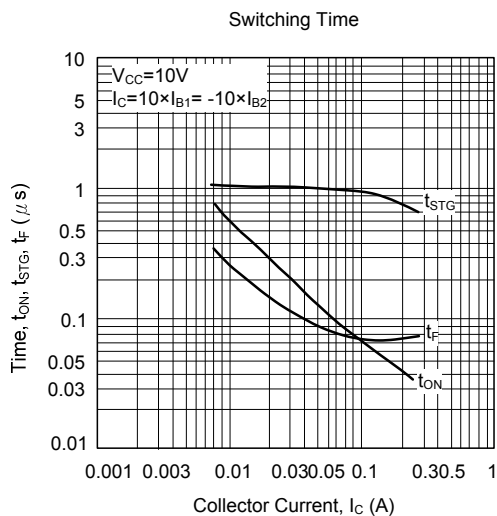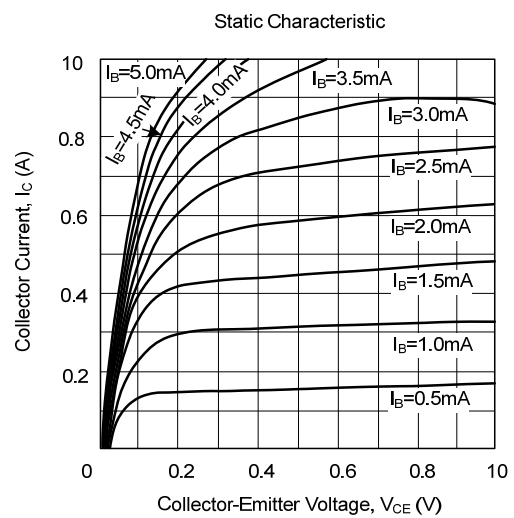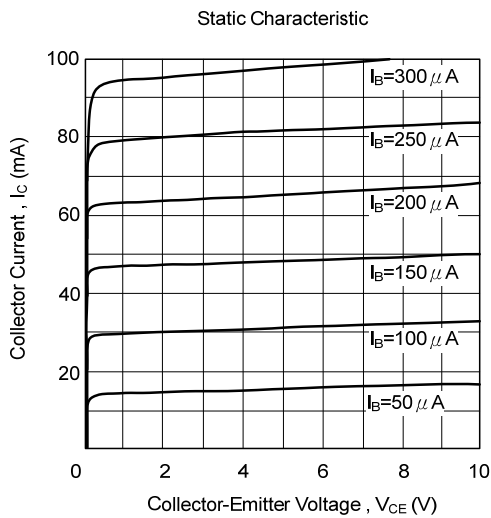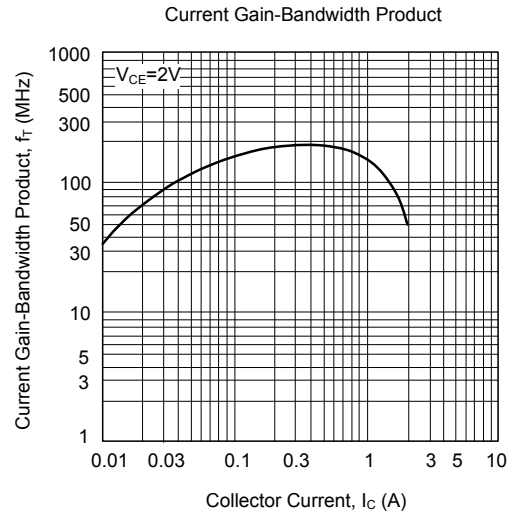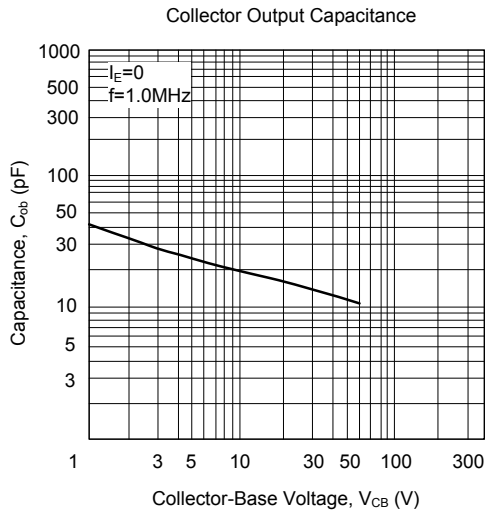

TYPICAL CHARACTERISTICS(Cont.)

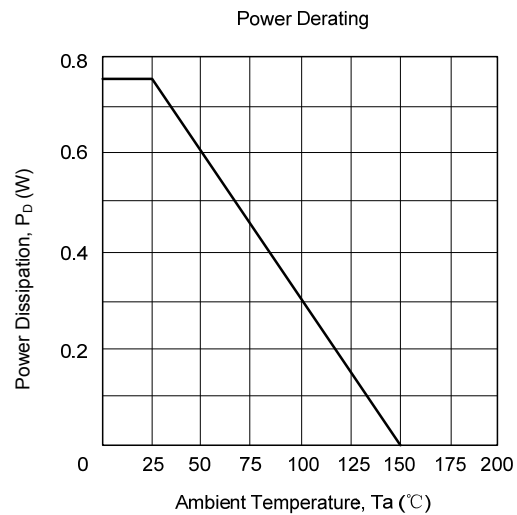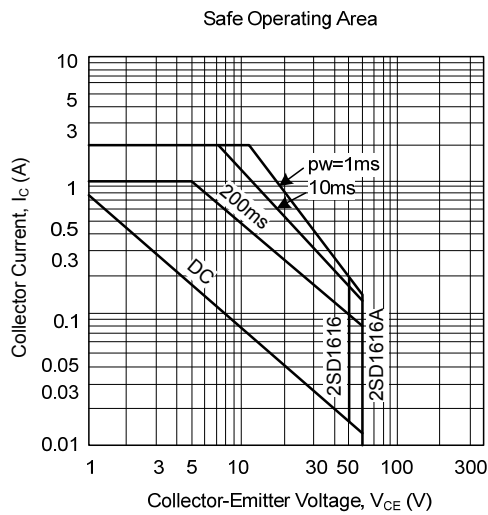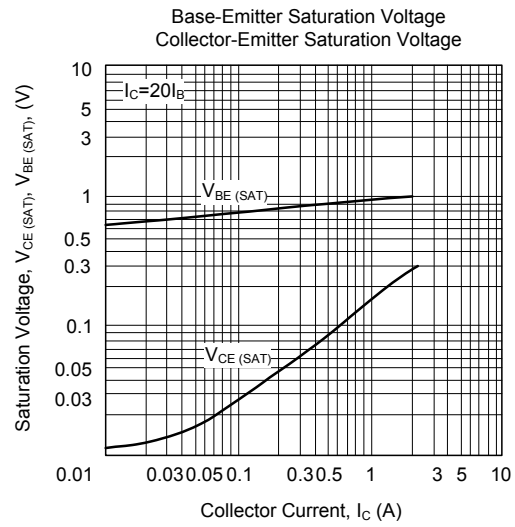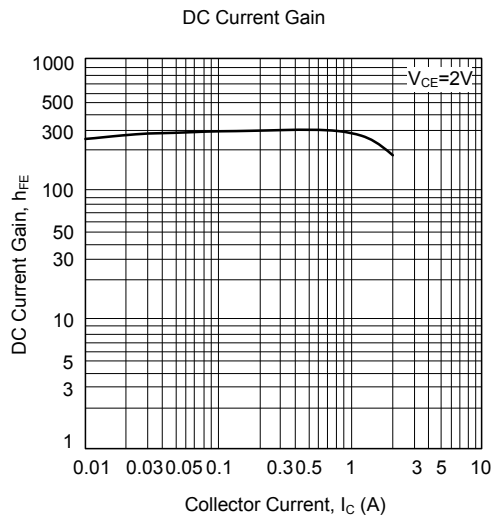

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.