



MAPX	MODIFICATION	DATE

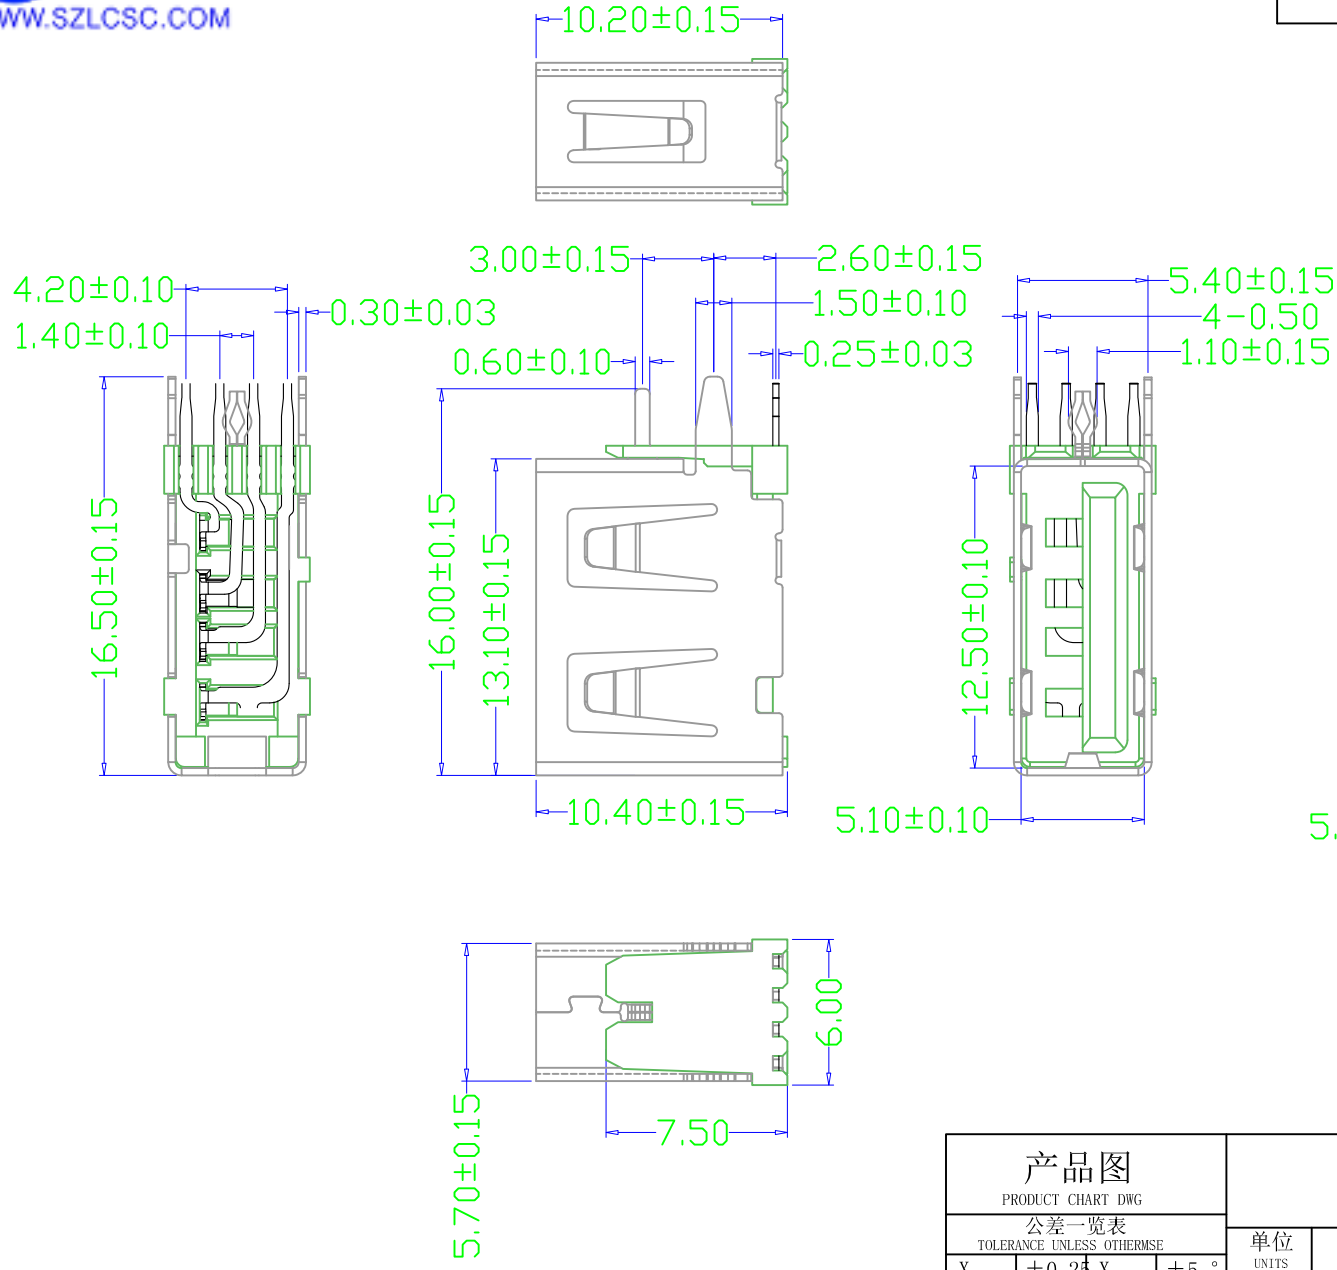

NOTE:

- Material:
Housing: Thermoplastics
Contact: Phosphor Bronze C5191-EH/C2680-EH, T=0.25mm
Shell: COPPER ALLOY T=0.30mm
- FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min.Tin Plated on Solder Area
50u" Min.Nickel Underplating Over All.
Shell: 50u" Min.Nickel Underplating Over All.
- Specification:
3.1: Rating:
Rated voltage 500V AC/DC. Rated current: 2 A Max.
3.2: Electrical:
Insulation Resistance(EIA-364-21):
1000M Ω Min. at 500V/DC for 1Minute.
Contact Resistance(EIA-364-23):
30 m Ω Max. at 20mV Max, 50mA
Dielectric Withstanding Voltage(EIA-364-20):
No discharge, flashover or breakdown at 500V/AC
1Minute
- Plug extraction force shall be between 1.0kgf and 2.00kgf
- Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

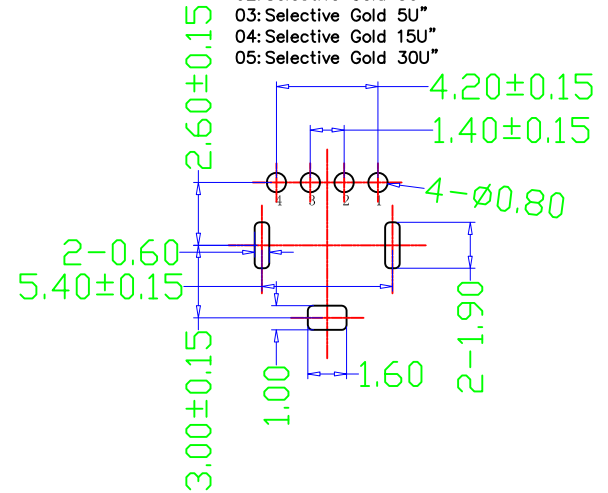

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ± 0.05

产品图 PRODUCT CHART DWG											
公差一览表 TOLERANCE UNLESS OTHERWISE				单位	MM	制图	Z-Y-B	制图料号			
X.	± 0.25	X.	$\pm 5.^\circ$	UNITS		DRAWING		PRODUCT PART NO.			
.X	± 0.20	.X	$\pm 2.^\circ$	比例	1:1	审核		产品名称	C39450		
.XX	± 0.15	.XX	$\pm 1.^\circ$	SCALE		CHKD		PRODUCT NO.			
.XXX	± 0.10	.XXX	$\pm 0.5^\circ$	日期	2014.02.20	核准		角法		版本	AO
				DATE		APPD		VIEW		VER	