
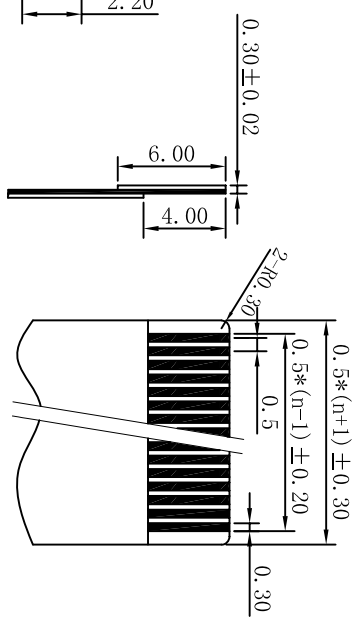



PCB Layout



适用扁平电缆

**SPECIFICATIONS**

- Pitch: 0.5
- Poles: 4~60
- Voltage rating: 50V DC/AC
- Current rating: 0.4A DC/AC
- Withstand Voltage: 200V AC/m
- Working Temperature: -20°C ~ +85°C
- Insulation Resistance: ≥500MΩ

- Material
- Contact: Phosphor Bronze Tin-plated
- Solder tab: Phosphor Bronze Tin-plated
- Housing: Heat resistance plastic (UL94V-0)
- Slider: Heat resistance plastic (UL94V-0)
- Package: Pipe package

**TOLERANCE TABLE**

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:

DATE:

CHECKED:

DATE:

DRAWN:

DATE:

舒梦

2012-09-21

深圳市灿科盟实业有限公司  
CKMTW CHANKLEMENT INDUSTRY CO., LTD

TITLE:

FPC0.5-XP 下接 掀盖式

PROD. P/N 0.5K-DX-nPWB

UNIT mm SCALE free

FILE NO. CKMTW-FPC-0053 REV. A C100