


### GBU

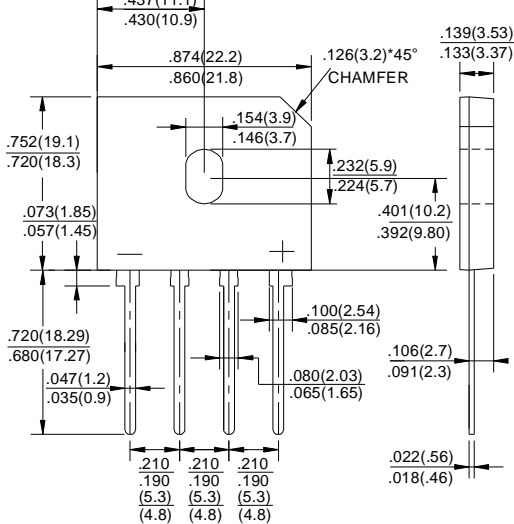

### FEATURES

- ◆ Surge overload rating -175 amperes peak
- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ Plastic material has U/L flammability classification 94V-0
- ◆ Mounting position:Any

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.






MDD Catalog Number	SYMBOLS	GBU 4005	GBU 401	GBU 402	GBU 404	GBU 406	GBU 408	GBU 410	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS	
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS	
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS	
Maximum average forward (with heatsink NOTE 2) Rectified current @ $T_c=100^\circ\text{C}$ (without heatsink)	$I_{(AV)}$	4.0						2.4		Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	150.0								Amps
Rating for Fusing ( $t < 8.3\text{ms}$ )	$I^2t$	93								$\text{A}^2\text{s}$
Maximum forward voltage at 2.0A DC	$V_F$	1.0								Volts
Maximum forward voltage at 4.0A DC	$V_F$	1.1								Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=125^\circ\text{C}$	$I_R$	10								$\mu\text{A}$
		500								$\mu\text{A}$
Typical Junction Capacitance (Note 1)	$C_J$	45								pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	2.2								$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$	-55 to +150								$^\circ\text{C}$
storage temperature range	$T_{STG}$	-55 to +150								$^\circ\text{C}$

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Device mounted on 75mm\*75mm\*1.6mm cu plate heatsink.

3. The typical data above is for reference only (典型值仅供参考).

# RATINGS AND CHARACTERISTIC CURVES GBU4005 THRU GBU410

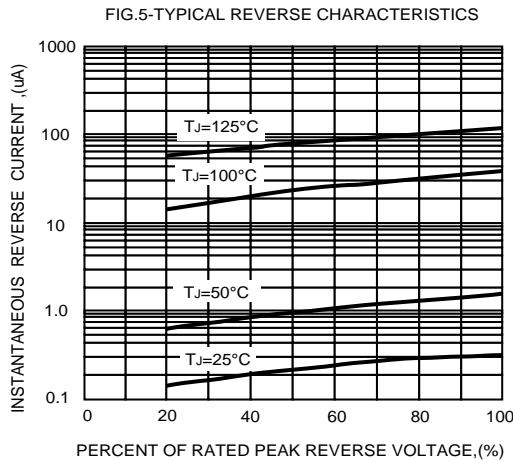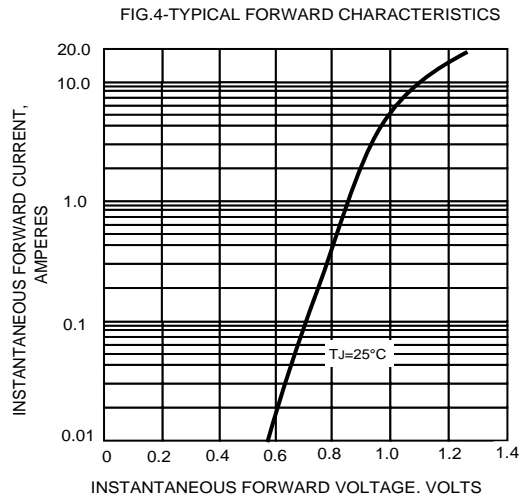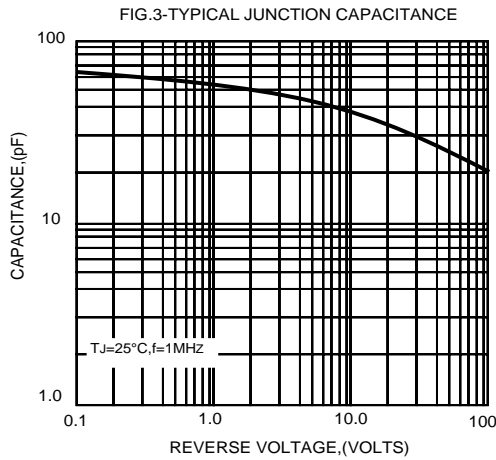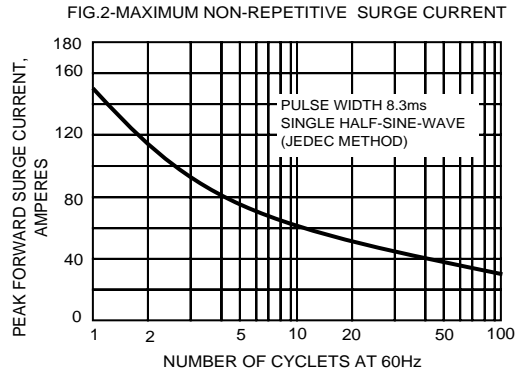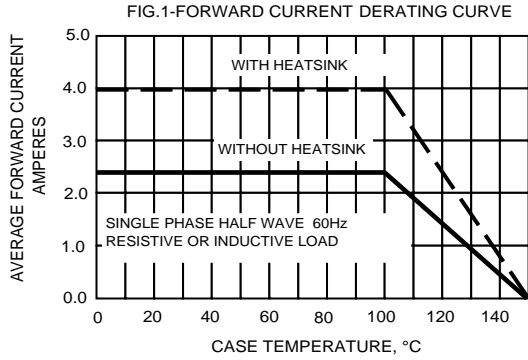

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!