

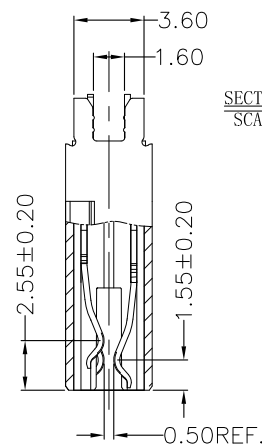


MAPX	MODIFICATION	DATE


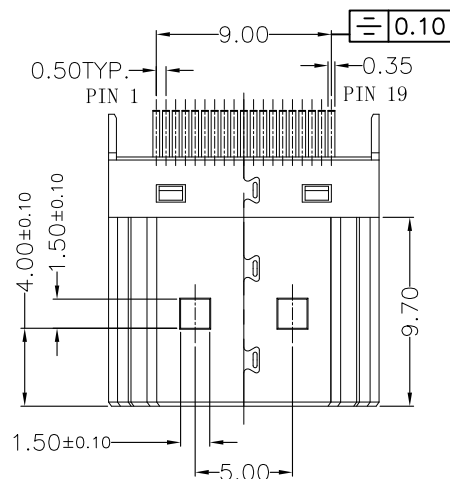


SECTION A-A
SCALE 1:1

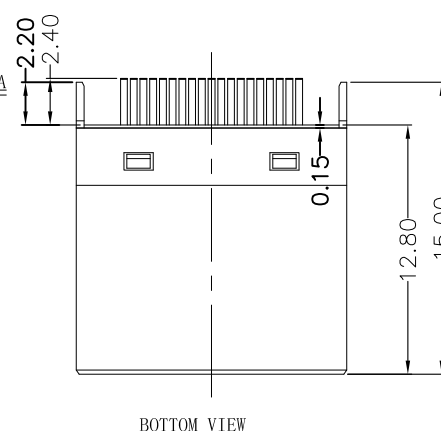

Specifications:

1. Insertion force: 44.1N MAX.
2. Withdrawal force: 9.8~39.2N.
3. Durability: 10000 Cycles.
4. Current rating: 0.5A
5. Voltage rating: 40V AC MAX.
6. Dielectric strength:
500V AC MIN. (UNMATED)
300V AC MIN. (MATED)
7. Contact resistance: 30mΩ MAX.
8. Insulation resistance:
100MΩ DC MIN (UNMATED)
10MΩ DC MIN (MATED)
9. Temperature: -40℃ TO +85℃
10. All the material must accord with the RoHS.
11. The important dimensions with "▲"

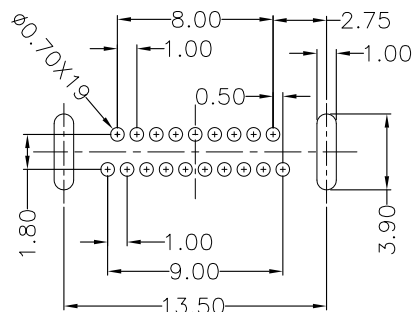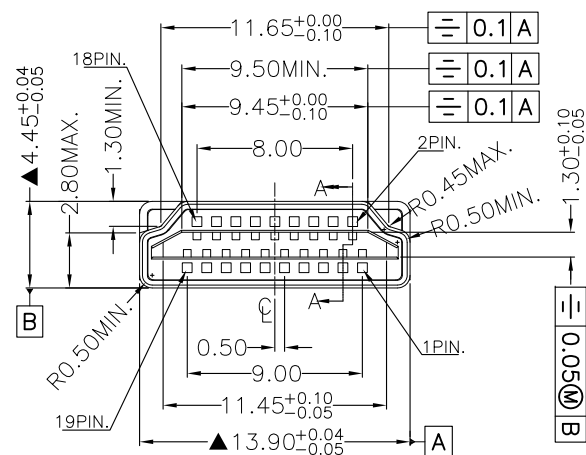

RECOMMENDED PCB LAYOUT
TOP VIEW
GENERAL TOLERANCE: T=1.60mm±0.05

Part Number:

HAM X X P XX 61
Shell Material: C: C2680 F: SPCC
Shell Plating: C: Gold N: Nickle
PIN: 19PIN
Terminal Plating:
01: Au 1u"
03: Au 3u"
05: Au 05u"
10: Au 10u"
15: Au 15u"
30: Au 30u"

产品图 PRODUCT CHART DWG					深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERWISE					单位 UNITS	MM	制图 DRAWING	许裕强	制图料号 PRODUCT PART NO.		
X.	±0.15	X.	±5°		比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	HDMI 19PM 线端A款-6-1夹板式 (1.6mm)	
.XX	±0.10	.X	±2°		日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	版本 VER	A0
.XXX	±0.05	.XX	±1°								
	±0.03	.XXX	±0.5°								

03	Terminal	C5191	19	Gold plated within connect area ,Tin plated within solder area
02	Housing	LCP	1	LCP+30%GF UL94-V0, Color is black
01	Shell	SPCC/C2680	1	Plating nickle or gold overall
序号 NO.	品名 PART NAME.	材料 MATERIAL	用量 QTY	备注说明 NOTE