


Circuit Diagram

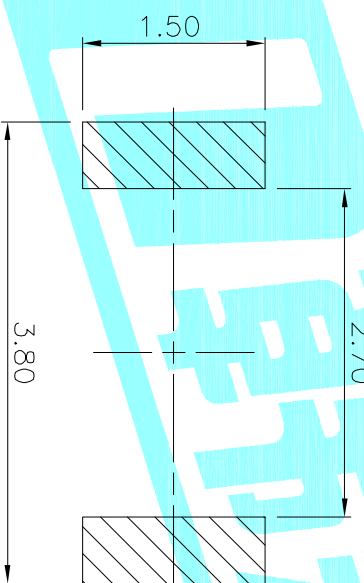

PCB Layout (Pattern Side)

- Typical Specifications :
1. Rating : DC 12V 50mA
 2. Travel: 0.15±0.05mm
 3. Operating force: 100gf, 180gf, 250gf
 4. Life: 100,000 Cycles Min.

NO.1	
PART NO.	vigor
2	100±30
3	180±30
4	250±30

NO.2	
PART NO	MATERIAL/QTY
S	SUS/1PC
D	SUS/2PCS

NO.3-NO.4	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
④	Dust cover	—	1	KAPTON FILM	Yellow	—
③	Terminal	—	2	Phosphor Bronze	Plating silver	—
②	Contact	—	2	F.Ag/SUS	Plating silver	—
①	Base	—	1	Nylon	Black	—

APPROVALS		DATE
DRAWN	QIFENG.XU	2014/9/13

CHECKED		TITLE: TACT SWITCHS	
APPROVALS		PART NO.	K2-1827SR-AD0W-00
TOLERANCES ARE		SCALE: 1:1	PROJ:
30~12.5	±0.30	ANGLE	±2°
10~30	±0.20	UNIT: mm	DRAWING NO.
5~10	±0.15		SHEET 1 OF 1
~5	±0.10		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			