


MAPX	MODIFICATION	DATE


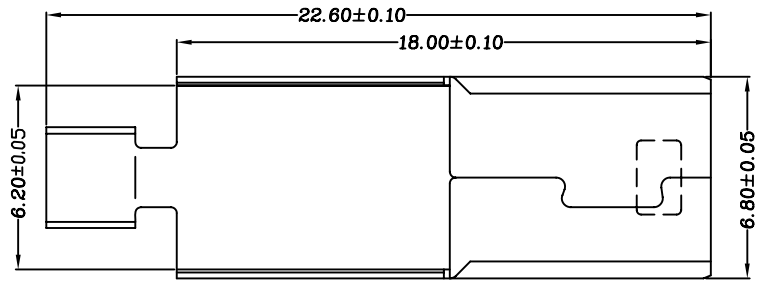


mini-USB-5PIN SOLDER TAIL
焊线式

特性:Specifications:
电学 Electrical:
接触阻抗:Contact Resistance
30milliohms MAX
耐压:Dielectric Withstanding Voltage:
500V AC AT sea Level
绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

材料:Material:
塑胶:Housing:Hing Temperature Thermoplastics,
UL 94V-0 耐高温塑胶
端子>Contact:Copper Alloy 铜合金
铁壳:Shell: SPCC-SD 铁
电镀:Finish:
端子>Contact: Plated Gold in Mating Area;
Tin/Lead On Solder Tails
接触点镀金, 脚镀锡铅

铁壳:Shell:
Tin/Lead Plating 镀锡

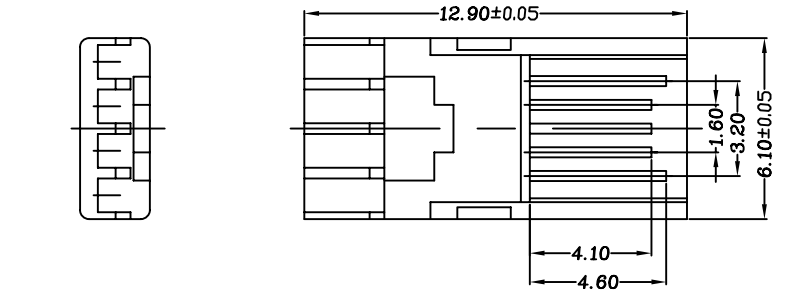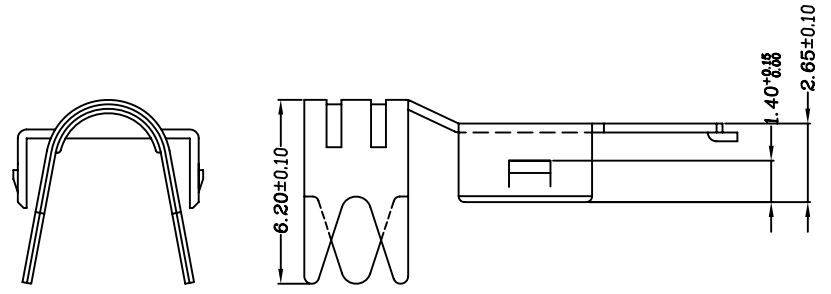

Ordering Informating

X - 5- XX

Contact plating
01-Gold Flash
02-1~3u*Gold/Tin
03-30u*Gold/Tin

Plastic Color
A=Black

产品图 PRODUCT CHART DWG											
公差一览表 TOLERANCE UNLESS OTHERMSE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.			
X.	±0.15	X.	±5.°	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	MI-USB-5P前五后四 焊线式公头(超薄型)		
.X	±0.10	.X	±2.°	日期 DATE	2010.03.06	核准 APPD	雷永健	角法 VIEW		版本 VER	AO
.XX	±0.05	.XX	±1.°								
.XXX	±0.03	.XXX	±0.5°								