



## Super Slide™ (Standard Type) RS\*\*1 Series

### Insulated lever

Part number	<b>RS30112AC00J</b>	
Number of resistor elements	Dual-unit	
Direction of lever	Vertical	
Travel	30mm	
Lever type	C	
Length of lever	10mm	
Total resistance	10kΩ	
Resistance taper	1B	
Detent	Without	
Mounting plate	With	
Operating temperature range	-25°C to +70°C	
Electrical performance	Total resistance tolerance	±20%
	Maximum operating voltage	200V AC, 10V DC
	Rated power	0.1W
	Insulation resistance	100MΩ min. 250V DC
	Voltage proof	300V AC for 1 minute
Mechanical performance	Operating force	0.3 to 2.5N
	Stopper strength	50N
	Lever push-pull strength	50N
	Lever wobble (Both	2mm

side)


Lever deviation 0.5mm max.  
(One side)

Durability Operating life 15,000 cycles

Minimum order unit Japan 600  
(pcs.)


Export 2,400

### Dimensions

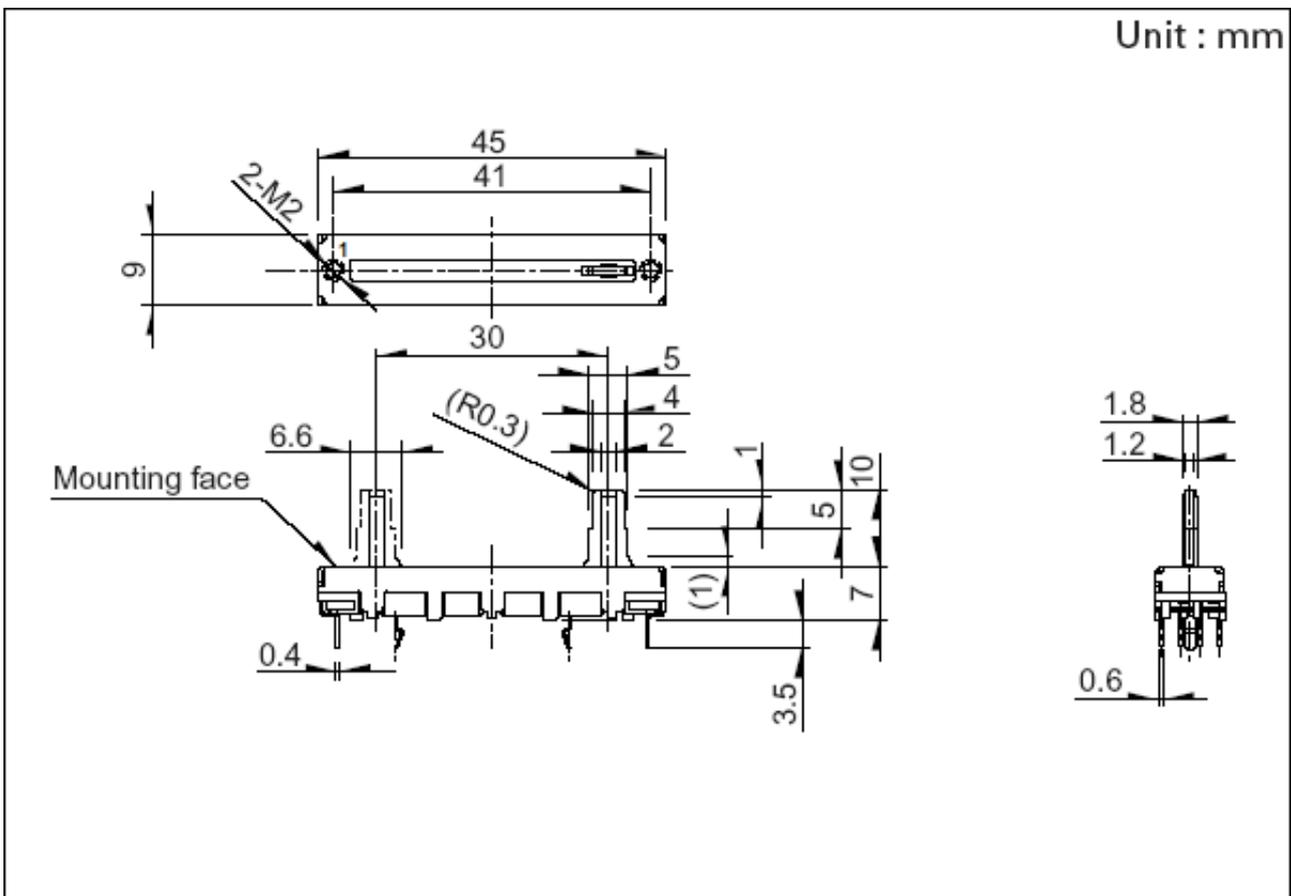


### Mounting Hole Dimensions

Unit : mm

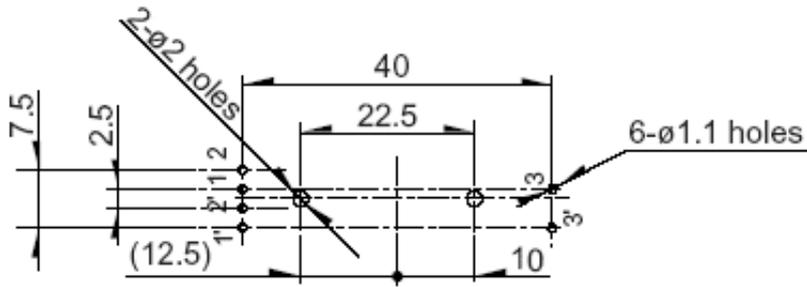

Viewed from mounting side.

### Terminal Layout / Circuit Diagram

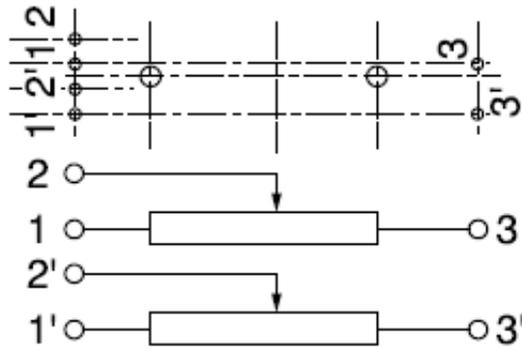

### Packing Specifications

#### Tray

Number of packages (pcs.)	1 case / Japan	600
	1 case / export packing	2,400

