

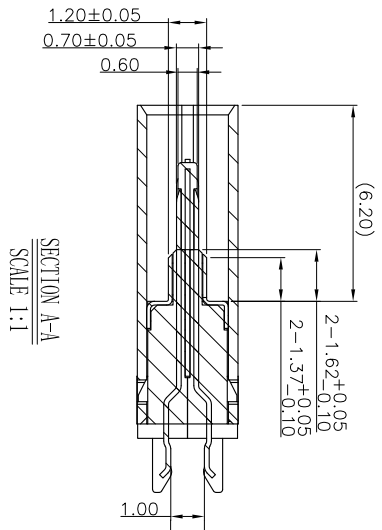
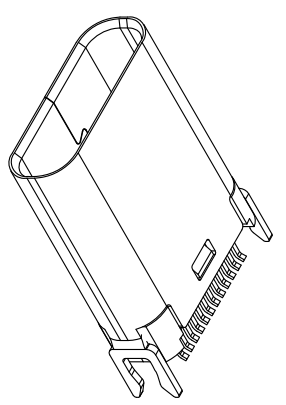
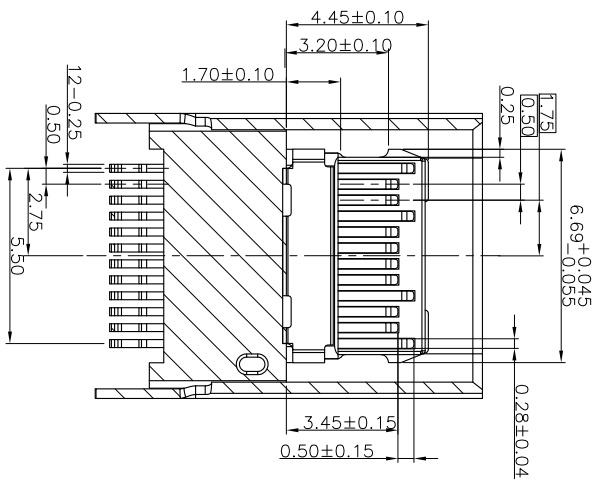
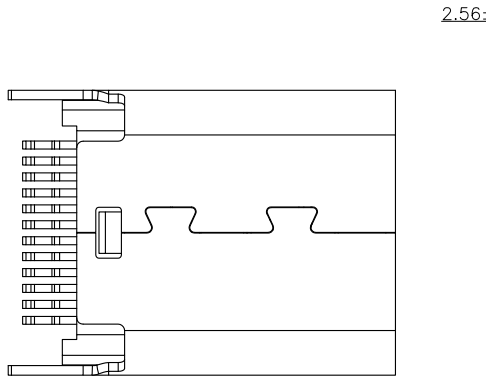


REV.	ECN. NO.	NAME	DATE
XA	NEW	CLY	2015/06/10

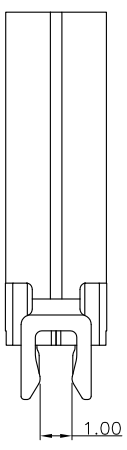

NOTES:
 1. MATERIAL:
 MOLDING: LCP UL94 V-0
 CONTACT: COPPER ALLOY.
 GOLD PLATED 30u" Min ON CONTACT AREA, 100u" Min TIN (LEAD FREE) ON SOLDER AREA,
 50u" NICKEL PLATING OVER ALL.
 SHILD: SUS304-H, T=0.12±0.03mm

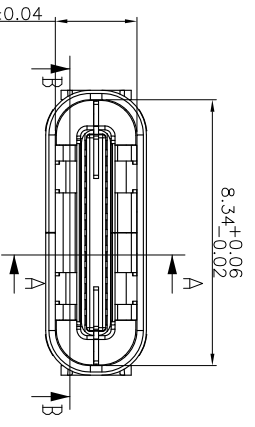

2. MECHANICAL:
 INSERTION: 5~20N.
 EXTRACTION: 8~20N.
 DURABILITY: 10000 CYCLES
 3. ELECTRICAL:
 CURRENT: 5A MIN FOR VBUS;
 0.25A MIN FOR OTHER.
 VOLTAGE: 5VAC MAX
 WITHSTANDING VOLTAGE: 100V AC.
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATION RESISTANCE: 100MΩ MIN.
 4. ENVIRONMENTAL
 TEMPERATURE RANGE -55°C ~ +85°C

RoHS Compliant

TOLERANCE UNSPECIFIED	
.0	±0.50
.0	±0.38
.000	±0.25
ANGLE	±0.10
MANUFACTURING COPY	±3.00°

TITLE: USB 3.1 C TYPE FEMALE SPLINT 1.00 MM CONNECTOR

DRAWN BY:	SIZE: A4	UNIT: mm.	PART NO. FPCR-245X-02-XX	REV. : XA
CHECKED BY:	SCALE: 1:1	PROJECTION	PROJECT	SHEET: 1/3
APPROVED BY:	DWG. PATH			