



MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:  
 1. HOUSING: SEE NOTES, UJ94V-0.  
 TERMINAL: SEE NOTES.  
 SHELL: SEE NOTES.

SPECIFICATION:

- ELECTRICAL CHARACTERISTIC:  
 CONTACT RESISTANCE: 30MΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN  
 INSULATION RESISTANCE: 1000MΩ MIN
- MECHANICAL CHARACTERISTIC:  
 INSERTION FORCE: 35N(3.57KGF) MAX  
 EXTRACTON FORCE: 10~35N(1.02~3.57KGF)MIN  
 DURABILITY: 1500 CYCLES EXTRACTON FORCE: 10~35N  
 5000 CYCLES MIN  
 5000 CYCLES EXTRACTON FORCE: 3~35N
- ENVIRONMENTAL:  
 OPERATING TEMPERATURE: -55°C+85°C
- Contact finish:

- Selective Gold Flash
- Selective Gold 3U"
- Selective Gold 5U"
- Selective Gold 15U"
- Selective Gold 30U"

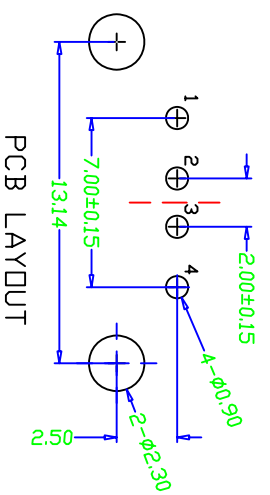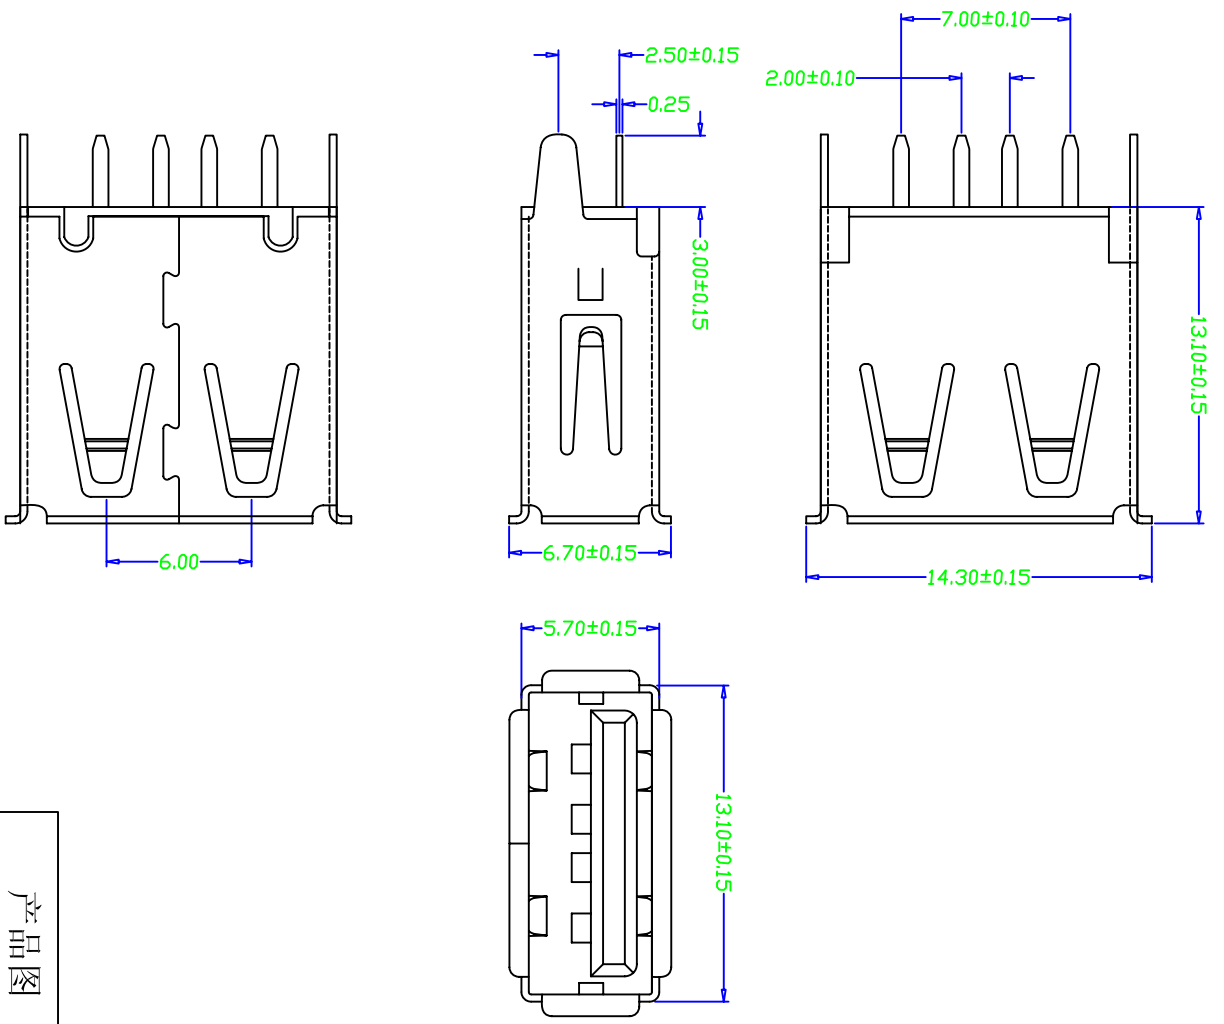

产品图  
 PRODUCT CHART DWG

公差一览表		单位	MM	制图	Z-Y-B	制料号
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO.
X ±0.25	X ±5°	SCALE	1:1	审核		产品名称
X ±0.20	X ±2°	比例		CHKD		PRODUCT NO.
XX ±0.15	XX ±1°	日期	2014.07.24	核准		USB A/F 180度插板式有边 (13.1)
XXX ±0.10	XXX ±0.5°	DATE		APRD		角法
						版本
						VER
						AD

1 2 3 4 5 6 7 8 9 10

G F E D C B A

G F E D C B A