
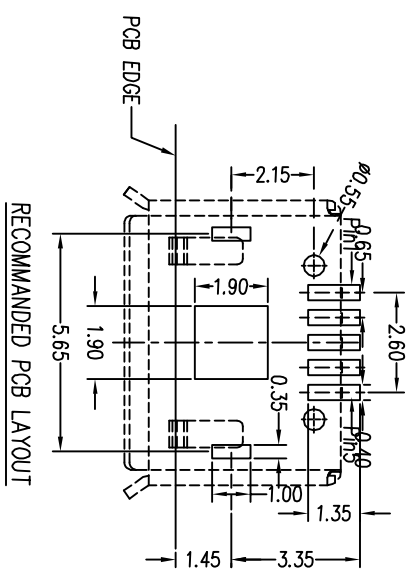
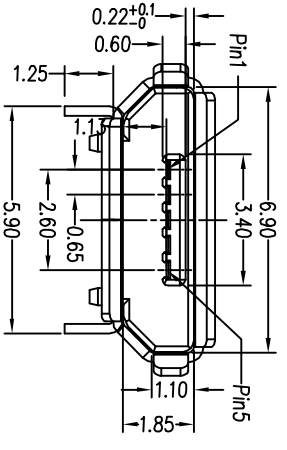
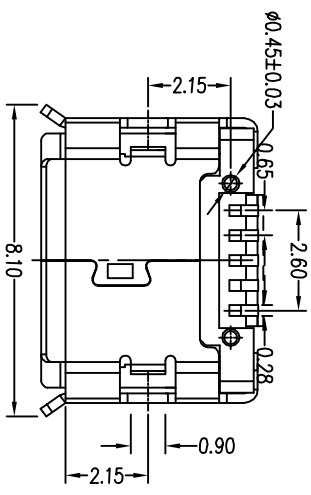

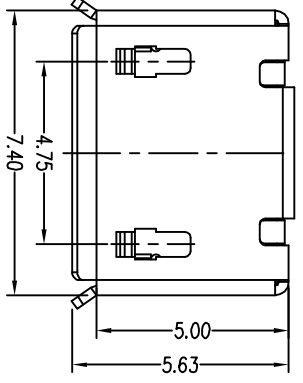



REV.	EQN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

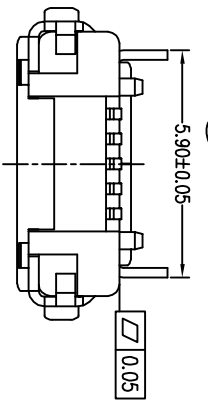

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f.i.UL94V-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 50 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
 - Temperature range: -30°C~80°C

Order Information:

1-MD055MXXX-01
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- | | | | |
|----------------|-----------|--------------------|------------------|
| 1: Assy. | 5: Style | 7: Contact plating | 8: Shell plating |
| 2: Series No. | M: Smt | 1: 1u" | T: Tin |
| 3: Contact No. | 6: Color | 2: 3u" | N: Nickel |
| 4: P: Plug | B: Black | 3: 5u" | A: Au plated all |
| 5: Socket | W: White | 4: 15u" | B: None |
| | N: Nature | 5: 30u" | ... |

PART NO: 1-MD055MXXX-01		MATERIAL: SEE NOTE	
MODEL NO:		FINSH: SEE NOTE	
UNIT: mm	SIZE: A4	COLOR: SEE NOTE	
TOLERANCE UNSPECIFIED			
.x	±0.38	DR:	
.xx	±0.25	CHK:	
.xxx	±0.13	APP:	
ANG.	±2°	SCALE: 1:1	
TITLE: Micro usb 5s B Type Smt 插板 9) 脚长1.25板		DWG NO: A055	REV: A
CUSTOMER DRAWING		SHEET: 1/1	

F
E
D
C
B
A

F
E
D
C
B
A

1 2 3 4 5 6 7 8